


**CAUTION! SHARP BLADE
ENCLOSED. HANDLE WITH
EXTREME CARE.**

Inventory of Enclosed :

- | | |
|-----------------|------------------------|
| (A) handle | (E) 2 philister screws |
| (B) bushing | (F) 2 square nuts |
| (C) blade | (G) file |
| (D) truss screw | (H) jig |

Assembly Instructions :

Scraper Handle

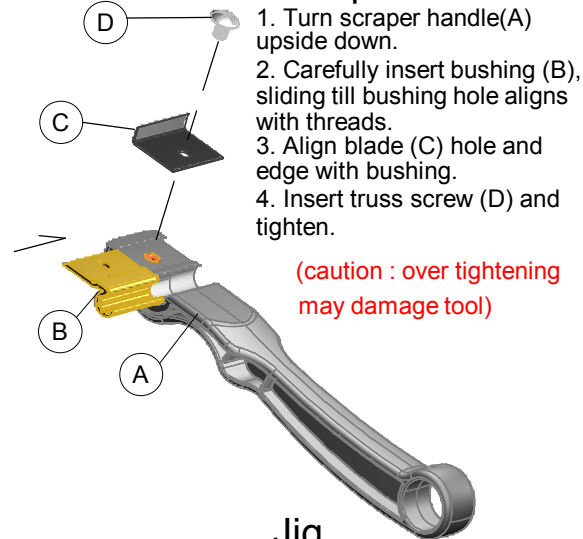

Jig

1. Place screws (E) through slot in jig (H) and start into nuts (F).
 2. With jig (H) flat on its side, place file (G) between screws (E) and jig (H), allowing gravity to align flush.
 3. Tighten screws (E) until it pins file (G) against jig (H).
- (caution : over tightening may warp or damage tool)

